

BEECH PANELS WITH FINGERJOINT



READY TO USE PANELS

STANDARD SIZES IN STOCK, SUPERIOR QUALITY, SANDED THICKNESS

18 mm	1m10 x 4m50 1m21 x 3m00	36 pcs/bundle 36 pcs/bundle
30 mm	1m10 x 4m50 1m21 x 3m00	20 pcs/bundle 20 pcs/bundle
33 mm	1m10 x 4m50	20 pcs/bundle
40 mm	0m65 x 4m50 1m10 x 4m50 1m21 x 3m00	25 pcs/bundle 17 pcs/bundle 20 pcs/bundle
44 mm	1m10 x 4m50	15 pcs/bundle
56 mm	0m65 x 4m50	20 pcs/bundle
SQUARES IN STOCK		
70 x 70 x 4500 85 x 85 x 4500		56 pcs/bundle 55 pcs/bundle

Characteristics of the PANELS very lightly steamed, kiln-dried 10 % (+/- 2 %), D3 glue, both sides sanded G100, lamellas 45 mm (38-52), uniform in each panel, all panels individually plastic wrapped.

WE ALSO PRODUCE TO YOUR SPECIFICATIONS

panels, scantlings, door frames, glued table legs, etc. minimum quantity: 5-10 m3 delivery time = approx 6 weeks. V.21.1






With more than 5000 m3 permanent stock in panels and 17 years of panel experience, DB Hardwoods can guarantee a short delivery time (max 1 week) and a consistent quality.



www.dbhardwoods.com

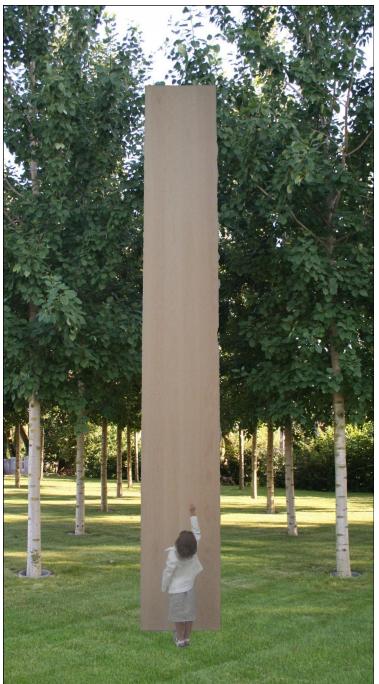

BEECH PANELS WITHOUT FINGERJOINT READY TO USE PANELS

STANDARD SIZES IN STOCK,

SUPERIOR QUALITY,	SANDED THICKNESS
-------------------	------------------

18 mm	650 x from 900 to 1300 650 x from 2000 to 2800
33 mm	650 x from 900 to 1900 650 x from 2000 to 3500 650 x from 3600 to 4800
40 mm	650 x friom 900 to 1900 650 x from 2000 to 3500 650 x from 3600 to 4800
44 mm	650 x from 900 to 1900 650 x from 2000 to 3500 650 x from 3600 to 4800
SQUARES IN STOCK	

70 x 70	from 1200 to 1700 + from 1800 to 2800
85 x 85	from 1200 to 1700 + from 1800 to 2800

Length increases per 100 mm. You can choose the bundels that you want out of our stock list.

Characteristics of the PANELS very lightly steamed, kiln-dried 10 % (+/- 2 %), variable wide lamellas: average 80 mm/+, D3 glue, both sides sanded G100, long lengths up to 4m80 WITHOUT fingerjoint, all panels individually plastic wrapped.

WE PRODUCE TO YOUR SPECIFICATIONS

complete range for the staircase manufacturer: treads, risers, strings, newels, handrails delivery time = approx 6 weeks.







